

HUB TENT 42 SQM

MULTIPURPOSE
TENTS



FLAME RETARDANT
CPAI-84 / 6



GOOD WIND
RESISTANCE



UV RESISTANT



DISINFECTABLE



EASY SETUP



ALL CLIMATES



DESCRIPTION

- » Multifunctional tent, can be used for storage, hospital; dispensary, school, office, ...
- » Frame with bottom/floor pipe for easy setup on hard floor
- » Good ventilation system

MAIN MATERIALS

OUTER TENT LINER	Woven PE 250 gsm - water, rot and UV proof - FR CPAI-84 Section 6
FRAME	Galvanised steel pipe Ø 30 x 1,2 mm with steel cross pieces
GROUND SHEET	Woven PE 250 gsm - water; rot and UV proof
WINDOWS	3 layered: roll-up PE flap, fixed mosquito mesh and transparent PVC roll-up flap
GUY ROPES AND RUNNERS	Black cords I Metal spring or elastic shock absorbers I Red metal guy runner

DIMENSIONS

LENGTH x WIDTH OUTER TENT	700 x 600 cm
FLOOR SURFACE	42 sqm
CENTRAL HEIGHT	290 cm
WALL HEIGHT	205 cm
DOORS	1 per gable I 210 x 140 cm
WINDOWS	2 per side I 145 x 150 cm

CUSTOMER REFERENCE
S5088015

HUB TENT 42 SQM

MULTIPURPOSE
TENTS

PERFORMANCE AND CHARACTERISTICS

SHELF LIFE	Min. 5 years
LIFE SPAN	Min. 1 year in all climates
FR	CPAI 84 Section 6 (max. afterflame avg 10s)
DESINFECTABILITY	Easily disinfected, not sensitive to fungi/mould
WIND RESISTANCE	Min. 100 km/h
COLORS	Tent liner: white Groundsheet: light grey

TENT FEATURES

TENT LINER PANELS	Separated roof, gables and wall panels for easy set up and handling
DOOR	1 door opening per gable
WINDOWS	2 windows on each side
VENTILATION	Triangular gable top ventilation opening and side wall ventilation above each window.
GROUND SHEET	Bath-tub style with min. 15 cm upstanding sides.
PEGS	40 cm T-pegs

PACKING

PACKING UNIT (P.U.)	2 no-nail wooden boxes strapped together
CONTENT P.U.	Tent, frame, accessories and hammer
QTY P.U.	1 piece
P.U. MEASUREMENTS	DIMENSIONS: 225 x 57 x 72 cm WEIGHT: ± 240 kg VOLUME: 0,93 m ³
LOADING	PER 20 FT DC 30 pcs palletized PER 40 FT DC 60 pcs palletized PER 40 FT HC 60 pcs palletized

INDICATED WEIGHTS AND VOLUMES ARE FOR YOUR INFORMATION ONLY AND MAY VARY ACCORDING TO PRODUCT SPECIFICATION.
FOR ALL DIMENSIONS AND WEIGHTS A TOLERANCE OF 3% IS APPLIED

ADD-ONS


Connectability options (gable / lateral / cross connector)	Ceiling net
Partition set	A/C and heating solutions
Inner and winter liner: breathable FR fabric / breathable quilted FR fabric.	Hard flooring
Cabins: individual cabin / isolation cabins / negative pressure cabins	Lighting kits

Specifications & design may be altered without notice due to continuous product development.
LAST UPDATED 6/2023

HUB TENT 42 SQM

MULTIPURPOSE
TENTS

VISUAL REFERENCES

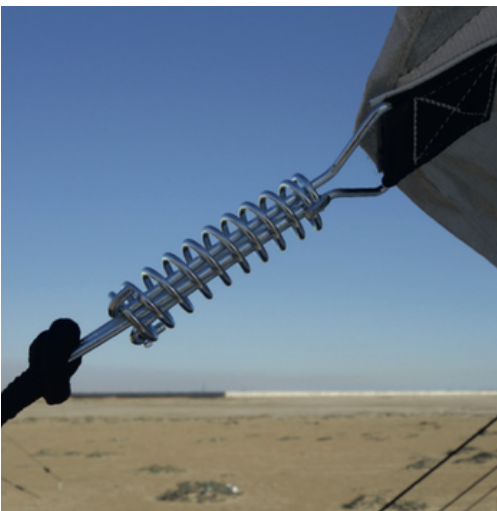

ALPINTER

+32 (0) 55 23 17 54

info@alpinter.com

www.alpinter.com

