

PLASTIC SHEETING 4X6 M

PLASTIC SHEETING



FUNGI / MOLD RESISTANT




FLAME RETARDANT EN13823+A1



UV RESISTANT



DISINFECTABLE

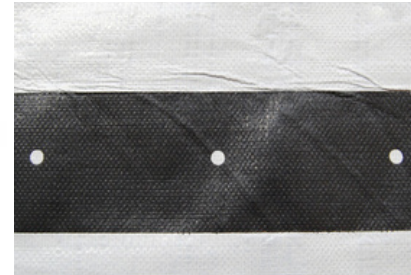

IFRC/ICRC STANDARD

CUSTOMER REFERENCE

HSHETARPW406

DESCRIPTION

- » Reinforced flexible tarpaulins for temporary shelter or protection
- » Made of woven HDPE black fibres

MAIN MATERIALS

MATERIAL

Woven HDPE black fibers fabric laminated on both sides with LDPE coating with 6 reinforced bands made of HDPE in the length

UV RESISTANCE

Max. 20% loss on mechanical strength after 1500 UV exposure

TEMPERATURE RESISTANCE

-20 to 80°C

TENSILE STRENGTH

Min. 500 N and 15% to 25% elongation in warp and weft as per ISO 1421-1

Min. 700 N inside the reinforcements bands as per ISO 1421-1

TEARING STRENGTH

Min. 100 N as per ISO 4674-1B

COLOR

White with dark grey reinforcement bands | Inner black fibres to ensure opacity

ALPINTER

+32 (0) 55 23 17 54

info@alpinter.com

www.alpinter.com



Brand from World of Tents

PLASTIC SHEETING 4X6 M

PLASTIC
SHEETING

DIMENSIONS

LENGTH x WIDTH	4 x 6 m
WEIGHT	190 g/m ² ± 20 g, plus 10% for the reinforcement bands

PACKING

PACKING UNIT (P.U.)	Bale
QTY P.U.	5 pieces
P.U. MEASUREMENTS	DIMENSIONS: 76 x 57 x 13 cm WEIGHT: 23,25 kg VOLUME: 0,054 m ³
QTY PALLET	18 bales per CRI pallet
PALLET MEASUREMENTS	DIMENSIONS: 115 x 75 x 115 cm WEIGHT: 430 kg VOLUME: 0,992 m ³
LOADING	PER 20 FT DC 2750 pcs unpalletized 2700 pcs palletized PER 40 FT DC 5500 pcs unpalletized 5400 pcs palletized PER 40 FT HC 5800 pcs unpalletized 5400 pcs palletized

INDICATED WEIGHTS AND VOLUMES ARE FOR YOUR INFORMATION ONLY AND MAY VARY ACCORDING TO PRODUCT SPECIFICATION.
FOR ALL DIMENSIONS AND WEIGHTS A TOLERANCE OF 3% IS APPLIED

STOCKS

Belgium, China, UAE