





PLASTIC SHEETING 4X60 M

PLASTIC
SHEETING



- 

FUNGI / MOLD
RESISTANT
- 

FLAME RETARDANT
CPAI-84 / 6
- 

UV RESISTANT
- 

DISINFECTABLE

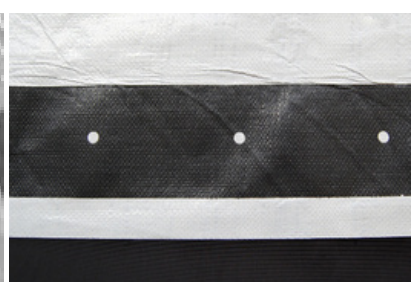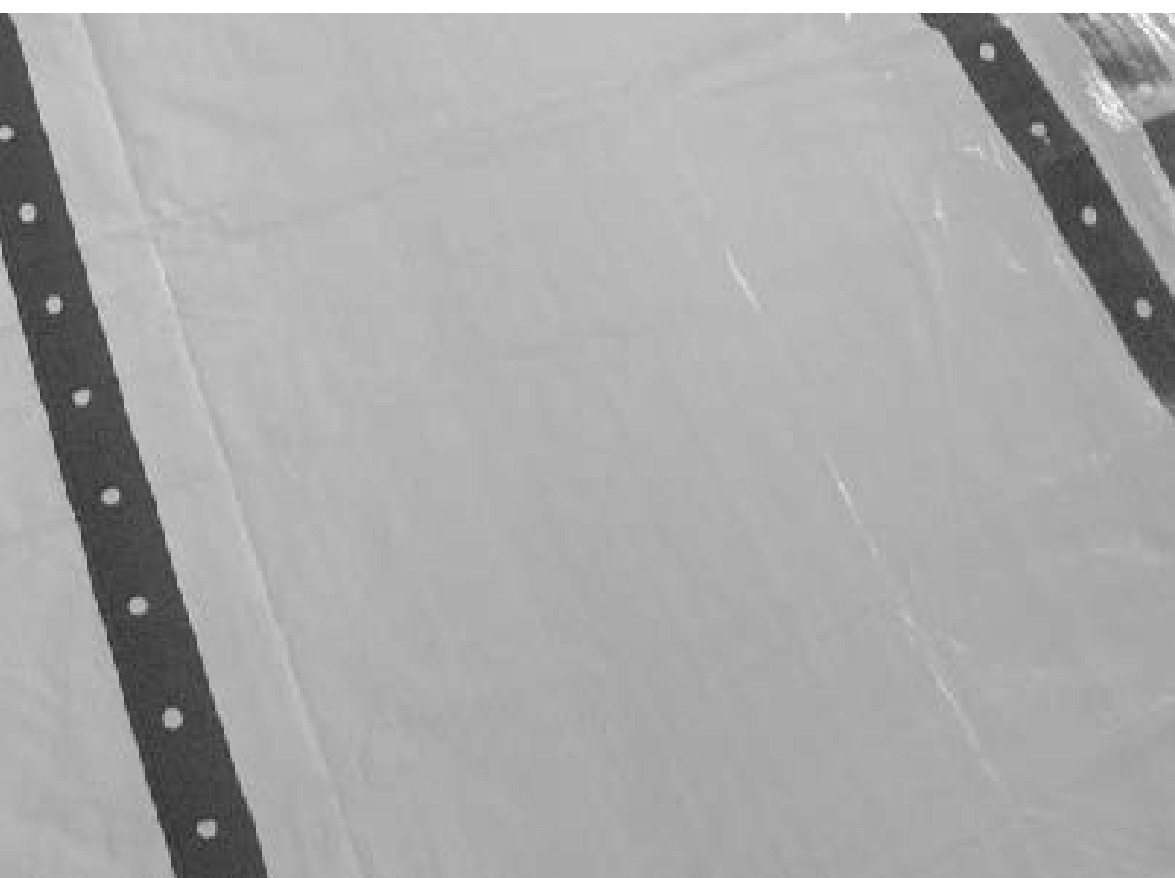

UNHCR/UNICEF STANDARD
CUSTOMER REFERENCE
HSHETARPW460

DESCRIPTION

- » Reinforced flexible tarpaulins for temporary shelter or protection
- » Made of woven HDPE black fibres

MAIN MATERIALS

MATERIAL	Woven HDPE black fibers fabric laminated on both sides with LDPE coating with 6 reinforced bands made of HDPE in the length I Prepunched 8 mm holes on the 2 side bands at 0,1 m intervals
UV RESISTANCE	Max. 20% loss on original tensile strength and not less than 475N after 1500 UV exposure (UVB 313nm peak)
TEMPERATURE RESISTANCE	-20 to 80°C
TENSILE STRENGTH	Min. 500 N and 15% to 25% elongation in warp and weft as per ISO 1421-1 Min. 700 N inside the reinforcement bands as per ISO 1421-1
TEARING STRENGTH	Min. 100 N as per ISO 4674-1B
COLOR	White with dark grey reinforcement bands I Inner black fibres to ensure opacity

PLASTIC SHEETING 4X60 M

PLASTIC
SHEETING

DIMENSIONS

LENGTH x WIDTH	4 x 60 m
WEIGHT	190 g/m ² ± 20 g, plus 10% for the reinforcement bands (approx. 5 kg)

PACKING

PACKING UNIT (P.U.)	Bale
QTY P.U.	1 piece
P.U. MEASUREMENTS	DIMENSIONS: 115 x 75 x 12 cm WEIGHT: 45 kg VOLUME: 0,104 m ³
QTY PALLET	9 bales per pallet
PALLET MEASUREMENTS	DIMENSIONS: 115 x 75 x 120 cm WEIGHT: 420 kg VOLUME: 1,0,35 m ³
LOADING	PER 20 FT DC 280 pcs unpalletized I 270 pcs palletized PER 40 FT DC 560 pcs unpalletized I 540 pcs palletized PER 40 FT HC 560 pcs unpalletized I 540 pcs palletized

INDICATED WEIGHTS AND VOLUMES ARE FOR YOUR INFORMATION ONLY AND MAY VARY ACCORDING TO PRODUCT SPECIFICATION.
FOR ALL DIMENSIONS AND WEIGHTS A TOLERANCE OF 3% IS APPLIED

STOCKS

Belgium, China

Specifications & design may be altered without notice due to continuous product development.
LAST UPDATED 8/2023