


PLASTIC SHEETING 4 X 50 M

PLASTIC SHEETING

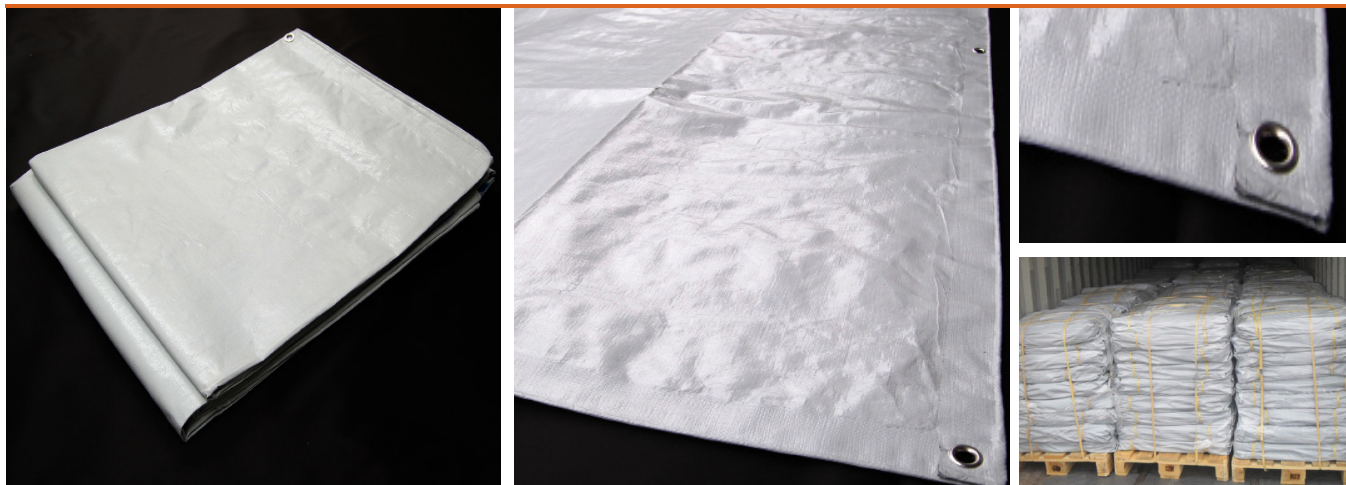

Specifications & design may be altered without notice due to continuous product development. LAST UPDATED 10/2021

-  FIRE RETARDANT
CPAI-84 / 6
-  FUNGI / MOLD
RESISTANT
-  DISINFECTABLE
-  GOOD UV
RESISTANCE

UNHCR/UNICEF STANDARD

CUSTOMER REFERENCE

03153
S5086013

DESCRIPTION

- » Reinforced flexible tarpaulins for temporary shelter or protection
- » Made of woven HDPE black fibres

DIMENSIONS

LENGTH x WIDTH	4 x 50 m ± 1%
WEIGHT	190 g/m ² ± 20 g (approx. 38 kg)

MAIN MATERIALS

MATERIAL	Woven HDPE black fibers fabric laminated on both sides with LDPE coating
UV RESISTANCE	Max. 5% loss on mechanical strength after 1500 UV exposure
TEMPERATURE RESISTANCE	-20 to 80°C
TENSILE STRENGTH	Min. 600 N in warp and weft (BS 2576, 50 mm grabtest or equivalent) Max. 5% loss on original tensile value under ISO 1421 after 1500 UV exposure (UVB 313 nm peak)
TEARING STRENGTH	Min. 100 N in warp and weft as per ISO 4674
COLOR	White on both sides Inner black fibres to ensure opacity
LOGO PRINTING	Upon customer request

PACKING

PACKING UNIT	Bale
PACKED QTY PER PACKING UNIT	1 pcs
DIMENSIONS WEIGHT VOLUME	75 x 55 x 20 cm 36 kg 0,083 m ³
PACKED QTY PER PALLET	10 pcs per CRI pallet
DIMENSIONS WEIGHT VOLUME	115 x 75 x 115 cm 380 kg 0,992 m ³
PACKED QTY PER 20 FT DC	350 pcs unpalletized 300 pcs palletized
PACKED QTY PER 40 FT DC	700 pcs unpalletized 600 pcs palletized
PACKED QTY PER 40 FT HC	750 pcs unpalletized 600 pcs palletized

INDICATED WEIGHTS AND VOLUMES ARE FOR YOUR INFORMATION ONLY AND MAY VARY ACCORDING TO PRODUCT SPECIFICATION TOLERANCES. PLEASE CONTACT US FOR THE EXACT INFORMATION.

STOCKS

China