

PLASTIC SHEETING 4X6 M

PLASTIC
SHEETING



FUNGI / MOLD
RESISTANT




FLAME RETARDANT
EN13823+A1



UV RESISTANT



DISINFECTABLE

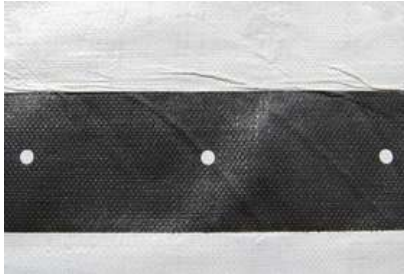

IFRC/ICRC STANDARD

CUSTOMER REFERENCE

HSHETARPW406

DESCRIPTION

- » Reinforced flexible tarpaulins for temporary shelter or protection
- » Made of woven HDPE black fibres

MAIN MATERIALS

MATERIAL	Woven HDPE black fibers fabric laminated on both sides with LDPE coating with 6 reinforced bands made of HDPE in the length
UV RESISTANCE	Max. 20% loss on mechanical strength after 1500 UV exposure
TEMPERATURE RESISTANCE	-20 to 80°C
TENSILE STRENGTH	Min. 500 N and 15% to 25% elongation in warp and weft as per ISO 1421-1 Min. 700 N inside the reinforcements bands as per ISO 1421-1
TEARING STRENGTH	Min. 100 N as per ISO 4674-1B
COLOR	White with dark grey reinforcement bands I Inner black fibres to ensure opacity

PLASTIC SHEETING 4X6 M

PLASTIC
SHEETING

DIMENSIONS

LENGTH x WIDTH	4 x 6 m
WEIGHT	190 g/m ² ± 20 g, plus 10% for the reinforcement bands

PACKING

PACKING UNIT (P.U.)	Bale
QTY P.U.	5 pieces
P.U. MEASUREMENTS	DIMENSIONS: 75 x 55 x 13 cm
	WEIGHT: 22,5 kg
	VOLUME: 0,054 m ³
QTY PALLET	18 bales per CRI pallet
PALLET MEASUREMENTS	DIMENSIONS: 115 x 75 x 113 cm
	WEIGHT: 428,5 kg
	VOLUME: 0,975 m ³
LOADING	PER 20 FT DC 2750 pcs unpalletized 2700 pcs palletized
	PER 40 FT DC 5500 pcs unpalletized 5400 pcs palletized
	PER 40 FT HC 5500 pcs unpalletized 5400 pcs palletized
INDICATED WEIGHTS AND VOLUMES ARE FOR YOUR INFORMATION ONLY AND MAY VARY ACCORDING TO PRODUCT SPECIFICATION. FOR ALLDIMENSIONS AND WEIGHTS A TOLERANCE OF 3% IS APPLIED	

STOCKS

Belgium, China, UAE

Specifications & design may be altered without notice due to continuous product development.
LAST UPDATED 8/2023