


PLASTIC SHEETING 4 X 6 M

PLASTIC SHEETING



FLAME RETARDANT
EN 13823+A1

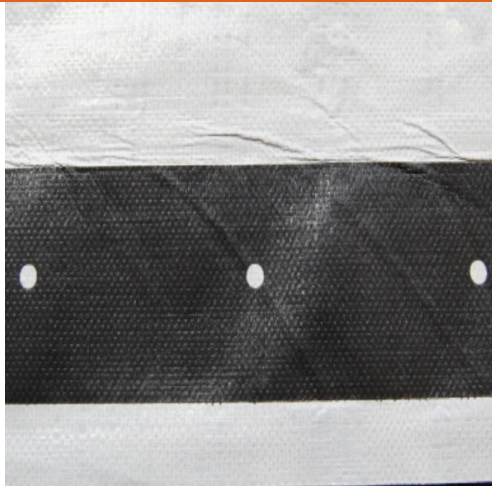

FUNGI / MOLD
RESISTANT



DISINFECTABLE



GOOD UV
RESISTANCE

IFRC/ICRC STANDARD

CUSTOMER REFERENCE

HSHETARPW406

DESCRIPTION

- » Reinforced flexible tarpaulins for temporary shelter or protection
- » Made of woven HDPE black fibres

DIMENSIONS

LENGTH x WIDTH	4 x 6 m
WEIGHT	190 g/m ² ± 20 g, plus 10% for the reinforcement bands

MAIN MATERIALS

MATERIAL	Woven HDPE black fibers fabric laminated on both sides with LDPE coating with 6 reinforced bands made of HDPE in the length
UV RESISTANCE	Max. 20% loss on mechanical strength after 1500 UV exposure
TEMPERATURE RESISTANCE	-20 to 80°C
TENSILE STRENGTH	Min. 500 N and 15% to 25% elongation in warp and weft as per ISO 1421-1 Min. 700 N inside the reinforcements bands as per ISO 1421-1
TEARING STRENGTH	Min. 100 N as per ISO 4674-1B
COLOR	White with dark grey reinforcement bands Inner black fibres to ensure opacity
LOGO PRINTING	Upon customer request

PACKING

PACKING UNIT	Bale
PACKED QTY PER PACKING UNIT	5 pcs
DIMENSIONS WEIGHT VOLUME	70 x 55 x 13 cm 22,5 kg 0,054 m ³
PACKED QTY PER PALLET	18 bales per CRI pallet
DIMENSIONS WEIGHT VOLUME	115 x 75 x 113 cm 428,5 kg 0,975 m ³
PACKED QTY PER 20 FT DC	2750 pcs unpalletized 2700 pcs palletized
PACKED QTY PER 40 FT DC	5500 pcs unpalletized 5400 pcs palletized
PACKED QTY PER 40 FT HC	5500 pcs unpalletized 5400 pcs palletized

INDICATED WEIGHTS AND VOLUMES ARE FOR YOUR INFORMATION ONLY AND MAY VARY ACCORDING TO PRODUCT SPECIFICATION TOLERANCES. PLEASE CONTACT US FOR THE EXACT INFORMATION.

STOCKS

Belgium, China, UAE, Uganda

ALPINTER

+32 (0) 55 23 17 54 | info@alpinter.com | www.alpinter.com
HONG KONG ASIA | UGANDA EAST AFRICA | BELGIUM | BULGARIA | GERMANY EUROPE | UAE MIDDLE EAST

Specifications & design may be altered without notice due to continuous product development. LAST UPDATED 10/2021