



PLASTIC SHEETING 4 X 60 M

PLASTIC SHEETING

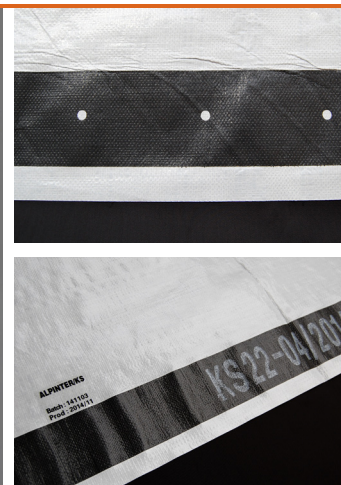

FUNGI / MOLD RESISTANT

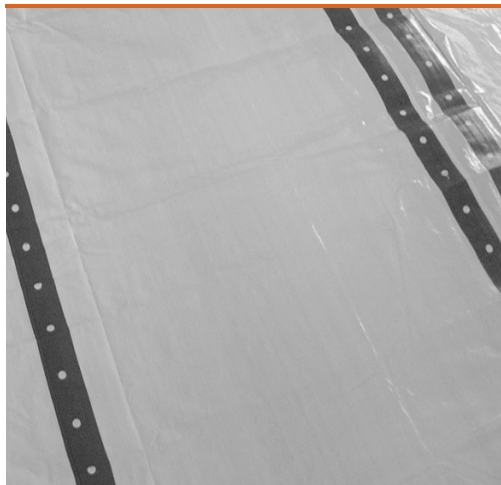

DISINFECTABLE



GOOD UV RESISTANCE

ICRC/IFRC STANDARD

CUSTOMER REFERENCE

HSHETARPW460

DESCRIPTION

- » Reinforced flexible tarpaulins for temporary shelter or protection
- » Made of woven HDPE black fibres

DIMENSIONS

LENGTH x WIDTH	4 x 60 m
WEIGHT	190 g/m ² ± 20 g, plus 10% for the reinforcement bands (approx. 5 kg)

MAIN MATERIALS

MATERIAL	Woven HDPE black fibers fabric laminated on both sides with LDPE coating with 6 reinforced bands made of HDPE in the length Pre-punched 8 mm holes on the 2 side bands at 0,1 m intervals
UV RESISTANCE	Max. 20% loss on original tensile strength and not less than 475N after 1500 UV exposure (UVB 313nm peak)
TEMPERATURE RESISTANCE	-20 to 80°C
TENSILE STRENGTH	Min. 500 N and 15% to 25% elongation in warp and weft as per ISO 1421-1 Min. 700 N inside the reinforcement bands as per ISO 1421-1
TEARING STRENGTH	Min. 100 N as per ISO 4674-1B
COLOR	White with dark grey reinforcement bands Inner black fibres to ensure opacity
LOGO PRINTING	Upon customer request

PACKING

PACKING UNIT	Roll
PACKED QTY PER PACKING UNIT	1 pcs
DIMENSIONS WEIGHT VOLUME	210 x 20 x 20 cm 45 kg 0,084 m ³
PACKED QTY PER PALLET	18 to 20 pcs per metal stackable pallet
DIMENSIONS WEIGHT VOLUME	225 x 105 x 112 cm 880 to 910 kg 2,646 m ³
PACKED QTY PER 20 FT DC	210 pcs unpalletized 186 pcs palletized
PACKED QTY PER 40 FT DC	530 pcs unpalletized 408 pcs palletized
PACKED QTY PER 40 FT HC	530 pcs unpalletized 408 pcs palletized

INDICATED WEIGHTS AND VOLUMES ARE FOR YOUR INFORMATION ONLY AND MAY VARY ACCORDING TO PRODUCT SPECIFICATION TOLERANCES. PLEASE CONTACT US FOR THE EXACT INFORMATION.

STOCKS

Belgium, China

ALPINTER

+32 (0) 55 23 17 54 | info@alpinter.com | www.alpinter.com
HONG KONG ASIA | UGANDA EAST AFRICA | BELGIUM | BULGARIA | GERMANY EUROPE | UAE MIDDLE EAST

Specifications & design may be altered without notice due to continuous product development. LAST UPDATED 11/2020